

1104/899



מדינת ישראל
STATE OF ISRAEL

REC'D 04 NOV 2004

WIPO



PCT

Ministry of Justice
Patent Office

משרד המשפטים
לשכת הפטנטים

This is to certify that
annexed hereto is a true
copy of the documents as
originally deposited with
the patent application
particulars of which are
specified on the first page
of the annex.

זאת לתעודה כי
רצופים בזה העתקים
נכונים של המסמכים
שהופקדו לכתחילה
עם הבקשה לפטנט
לפי הפרטים הרשומים
בעמוד הראשון של
הנספח.

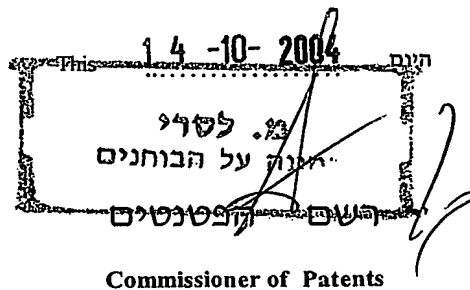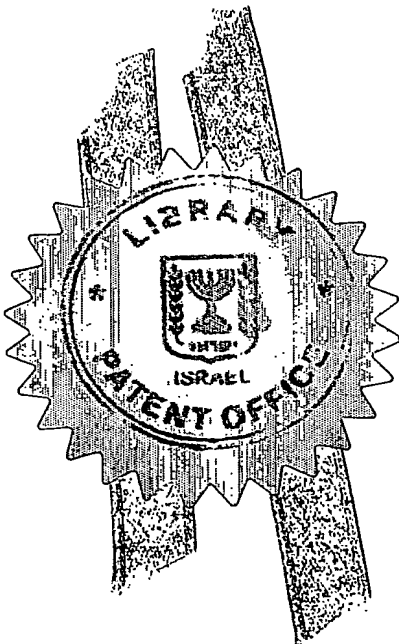

Commissioner of Patents

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

נתאשר
Certified

BEST AVAILABLE COPY

לשימוש הלישכה

For Office Use

מספר:

Number

158173

תאריך:

Date

30-09-2003

הוקדם/נדחה

Ante/Post-Dated

ממציאים:

רז ילינק

az Jelinek

חוק הפטנטים, תשכ"ז-1967

Patent Law, 5727 - 1967

בקשה לפטנט

Application for Patent

אני, (שם המבקש, מענו ולגבי גוף מאוגד - מקום התאגדות)

I, (Name and address of applicant, and in case of body corporate-place of incorporation)

Ben-Gurion University of the Negev
Research and Development Authority
P.O.Box 653, Beer Sheva 84105, Israel

אוניברסיטת בן-גוריון בנגב
הרשות למחקר ופיתוח
ת.ד. 653, באר שבע 84105

שמה הוא

in invention the title of which is

THE LAW הדין

בעל ההמצאה מכח

Owner, by virtue of

תאים חיים המכילים נאנו-טלאים

(בעברית)

(Hebrew)

Nanopatch-containing cells

(באנגלית)

(English)

מבקש בזאת כי ינתן לי עליה פטנט. hereby apply for a patent to be granted to me in respect thereof.

*בקשת חלוקה - Application of Division	*בקשת פטנט מוסף - Application for Patent Addition	*דרישה דין קדימה Priority Claim		
*מבקשת פטנט from Application מס' _____ dated _____ מיום	*לבקשה/לפטנט to Patent/Apl. מס' _____ dated _____ מיום	מספר/סימן Number/Mark	תאריך Date	מדינת האיגוד Convention Country
*יפוי כח: כללי / מיוחד - דצוף בזה / עוד יוגש P.O.A.: general / individual - attached / to be filed later הוגש בענין 147199 filed in case				
המען למסירת מסמכים בישראל Address for Service in Israel Pyernik Rutman P.O.Box 10012 Beer Sheva 84106 פיירניק רוטמן ת.ד. 10012 באר שבע 84106 מספרנו: 11-013				

חתימת המבקש
Signature of Applicant

היום 25 בחודש ספטמבר שנה 2003
This 24th day of September of the year 2003

Pyernik Rutman

Pyernik Rutman
attorneys for Applicant

לשימוש הלישכה

טופס זה כשהוא מוטבע בחותם לישכת הפטנטים ומושלם במספר ובתאריך ההגשה, הינו אישור להגשת הבקשה שפרטיה רשומים לעיל.
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.

* מחק את המיותר Delete whatever is inapplicable

לע: 11-013

תאים חיים המכילים נאנו-טלאים

Nanopatch-containing cells

NANOPATCH-CONTAINING CELLS

Field of the Invention

The present invention relates to a novel cellular platform for detecting the presence of agents and conditions that cause changes in the conformation and/or function of the cell membrane, and/or are involved with biochemical processes occurring at the cell-membrane surface. More specifically, the present invention provides a colorimetric/fluorescent sensor of membrane perturbations that may be incorporated into the cell membrane of living cells.

Background of the Invention

There currently exist a number of different probes that may be used for investigating cellular processes *in vivo* and *in vitro*. Most of these probes, and the techniques associated therewith fall into one of the following two categories:

- a) radioactive, fluorescent or other readily-detectable labels that may be inserted or embedded into the cellular framework, such that specific chemical pathways and/or individual molecular entities may be studied;
- b) simple visualization tools for investigating activity, either within cellular compartments or at the level of the whole cell.

There is, however, a need for techniques that can enable real-time reporting of biological or chemical events that may affect the function and/or morphology of either the cell membrane, or alternatively, the function, morphology

and viability of the whole cell. A key feature of these desired techniques is that they will not be limited to any specific molecule, molecular pathway or specific cell type or cell line.

A number of prior art publications disclose the use of polydiacetylene-based means for detecting membrane-perturbing events and/or agents:

WO 98/39632 suggests the use of polydiacetylenes for detecting reactions, by means of exposing the reaction means to a biopolymeric material comprising said polydiacetylenes. Preferably, the biopolymeric material is provided in the form of liposomes, films, tubules and other membrane-simulating forms.

WO 99/10743 describes the encapsulation of polydiacetylenes into metal oxide glass, and the use of the transparent composite obtained for the detection of various analytes.

WO 00/55623 discloses a beneficial combination of polydiacetylenes, lipids and suitable means linked thereto for detecting the presence of analytes in a liquid sample, wherein said analytes cannot react chemically with said polydiacetylenes and lipids. Specifically mentioned analytes include metal ions, biological ligands and peptides.

It is to be noted, however, that none of the foregoing publications disclose the use of the polydiacetylene construct in living cells.

Other publications have disclosed detection systems for use inside the outer membranes of living cells. WO 95/27204, for example, discloses a method for detecting and measuring molecules located at the cell surface (e.g. receptors), wherein said method involves labeling the cells with a molecular probe comprising a lipophilic moiety and a reporter moiety, preferably a fluorescence-emitting reporter moiety.

It is a purpose of the present invention to provide a method for "engineering" cells such that they contain within their outer membrane a membrane perturbation-detecting construct.

It is another purpose of the invention to provide the aforementioned engineered cells in a viable form such that they may be used as an assay system for detecting and/or measuring changes in the conformation and function of their cell membrane and processes occurring at the membrane surface.

It is a further purpose of the invention to provide a method for detecting and/or measuring the presence of agents and conditions that cause changes in cell membrane function and/or structure and processes occurring at the membrane surface, said method involving the use of the aforementioned engineered cells.

Further objects and advantages of the present invention will become apparent as the description proceeds.

Summary of the Invention

It has now been surprisingly found that a chemical construct comprising polydiacetylenes and lipids may be assembled within the cell membrane of living cells, and that said construct retains its ability to undergo its characteristic chromatic (red to blue) transition and associated fluorescent emission in live cells in response to various perturbing agents and conditions. It has further been unexpectedly found that following insertion of said construct into the cell membrane of living cells, the viability of said cells is retained for a period of time that is sufficient to permit the use of said cells as a system for detecting and/or quantifying biochemical events that lead to structural and morphological changes in the cell membrane and/or other processes occurring at the surface of the cell membrane.

The present invention is primarily directed to isolated cells comprising nanopatch sensors which are integrated into the cell membrane thereof, wherein said sensors are provided in the form of perturbation-sensitive constructs, wherein said perturbation-sensitive constructs respond to perturbations of the cell membrane by means of a detectable change in one or more physical or chemical properties associated with said construct.

The term "nanopatch sensors" is used to indicate that the perturbation-sensitive constructs are present within the cell membrane as discrete patches having dimensions in the range of 1 nanometer to several hundreds of nanometers.

The term "perturbations of the cell membrane" is used herein to indicate any changes in the three-dimensional conformation and/or function of said cell membrane. Included within this definition are perturbations of the cell membrane that may lead to the aforementioned changes in function thereof, even when unaccompanied by any detectable or measurable conformational changes. In addition, the term includes within its scope biochemical processes that occur at the cell membrane surface which, while they do not cause significant structural or functional changes within the membrane itself, may result in the generation of signals that may be detected by the nanopatch sensors of the present invention. Examples of such biochemical processes include the interaction of ligands with their specific receptors, the outward passage of compounds from the cell (e.g. secretory processes) and induction of signaling processes (including such processes having their origin within the cytoplasm).

The aforementioned physical or chemical property associated with the construct may be any property or function that may be readily detected and/or measured. Preferably, such a property will be a form of electromagnetic radiation, such as visible light or ultraviolet or infrared radiation. Most preferably, the detected property will be a chromatic transition (e.g. a change in visible color of the cells or

portions thereof) or a fluorescent emission. Consequently, in one preferred embodiment of the isolated cells of the present invention, the detectable change in the physical or chemical properties associated with the perturbation-sensitive constructs is a change in the visible range absorption spectrum of said cells. In another such preferred embodiment, the detectable change in the physical or chemical properties is a change in the fluorescent emission spectrum of the cells.

In one preferred embodiment of the present invention, the aforementioned construct comprises a polymer associated with one or more lipid components. In a particularly preferred embodiment of the invention, the polymer is polydiacetylene (PDA). In an even more particularly preferred embodiment, the PDA is a polymer of 10,12-tricosadionic acid, and the lipid components are selected from the group consisting of dimyristoylphosphatidylglycerol, dimyristoylphosphatidylcholine and dimyristoylphosphatidylethanolamine.

When the polymer incorporated into the aforementioned construct is PDA, the detectable properties associated therewith are a blue-to-red color transition, and a fluorescent emission at 560 nm emitted from the red phase of the polymer.

In another aspect, the present invention is also directed to a process for producing living cells comprising the aforementioned nanopatch sensors, said process comprising the steps of preparing an aqueous solution comprising the

perturbation-sensitive construct, or precursors thereof, and co-incubating a suspension of said living cells with said construct or with said precursors, such that said construct becomes integrated into the cell membrane of said living cells. The abovementioned aqueous solution may comprise any water-based medium that is suitable for use together with living cells, and is preferably a buffered solution.

In one preferred embodiment of the process of the invention, the perturbation-sensitive construct comprises a polymerizable material associated with one or more lipid components, and said process further comprises polymerization-inducing short ultraviolet irradiation of said construct following co-incubation with the living cells.

In a particularly preferred embodiment of the process of the invention, the aforementioned polymerizable material is a monomer that may be polymerized to form PDA. In an even more particularly preferred embodiment, the monomer is 10,12-tricosadionic acid, and the lipid components are selected from the group consisting of dimyristoylphosphatidyl-glycerol, dimyristoylphosphatidylcholine and dimyristoylphosphatidylethanolamine.

In a further aspect, the present invention also provides a method for detecting and/or measuring agents and conditions that cause perturbations in the cell membranes of living cells, wherein said method comprises the steps of

introducing nanopatch sensors into said living cells in accordance with the process disclosed hereinabove, exposing said nanopatch sensor-containing cells to a known or putative perturbation-inducing agent or condition, and detecting and/or measuring one or more changes in the physical or chemical properties associated with said nanopatch sensors.

In one preferred embodiment of the method of the invention, the perturbation-sensitive construct contained within the nanopatch sensors comprises a polymer associated with one or more lipid components. In a particularly preferred embodiment of this aspect of the invention, the polymer is PDA. In an even more particularly preferred embodiment, the diacetylene polymer is a polymer of 10,12-tricosadionic acid, and the lipid components are selected from the group consisting of dimyristoylphosphatidyl-glycerol, dimyristoylphosphatidylcholine and dimyristoylphosphatidylethanolamine.

In one particularly preferred embodiment of this aspect of the invention, the change in the physical or chemical properties associated with said nanopatch sensors to be detected and/or measured is a change in the visible range absorption spectrum of said sensors.

In another particularly preferred embodiment of this aspect of the invention, the change in the physical or chemical properties associated with said nanopatch sensors to be detected and/or measured is a change in the fluorescent emission spectrum of said sensors.

All the above and other characteristics and advantages of the present invention will be further understood from the following illustrative and non-limitative examples of preferred embodiments thereof.

Brief Description of the Drawings

Fig. 1 graphically depicts the changes in the fluorescent spectra of NBD-PE and rhodamine incorporated within the lipid/PDA constructs upon association with U937 cells. The spectra indicate that significant integration of lipid/PDA construct within the cell membrane occurs.

Fig. 2 presents a set of visible microscopy images [top] and fluorescence microscopy images [bottom] showing lipid/PDA/U937 cell constructs in the initial blue phase [left] and red phase (induced by rapid heating) [right].

Fig. 3 is a fluorescent photomicrograph depicting the characteristic fluorescence seen after placing U937 cells containing lipid/PDA constructs of the present invention in a high osmotic pressure solution (1M sucrose).

Fig. 4 graphically depicts ultraviolet-visible spectra of U937 cells containing lipid/PDA constructs according to the present invention. Line 1 shows the spectrum obtained from cells contained in a normal aqueous buffer, while line 2 presents the spectrum of the same cells after having been placed in a high osmotic pressure (1M) sucrose solution.

Fig. 5 is a fluorescent photomicrograph depicting fluorescence in U937 cells containing lipid/PDA constructs of the present invention after placing said cells in a solution containing 50 μ M polymyxin-B peptide.

Fig. 6 is a fluorescent photomicrograph depicting fluorescence in U937 cells containing lipid/PDA constructs of the present invention following addition of 5 μ M lidocaine to the medium containing said cells.

Fig. 7 is a photomicrograph of U937 cells following addition of lipoplexes to the cell medium.

Fig. 8 is a photomicrograph of cultured neuronal cells that were isolated from murine brain tissue. The fluorescent light emitted by the cells emanates from the red phase of the polydiacetylene polymer, following incubation of the lipid/PDA/neuron construct in a medium containing 50 mM calcium ions.

Detailed Description of Preferred Embodiments

The present invention relates to a real-time novel cellular platform which may be used for detecting occurrence of cellular biochemical processes that involve membrane perturbation or take place at membrane surfaces. In contrast to the prior art cellular assays which, in general, detect specific chemical species or pathways within the cell, the cells and methods of the present invention are sensitive to any stimuli that induce functional and morphological modification of the cell membrane. A key

feature of the claimed invention is the fact that following introduction of the nanopatches into the cell membrane, the target cells remain alive (and therefore useful for real-time investigations of processes in viable cells) for periods of at least four hours.

The above-disclosed nanopatches may be incorporated into the cell membranes of both live prokaryotic cells (e.g. bacterial species) and live eukaryotic cells, including mammalian cell types such as epithelial cells, erythrocytes, monocytes, red blood cells, platelets and neurons. It is to be emphasized that the immediately preceding list of cell types is given for illustrative purposes only, and is not to be construed as limiting the scope of the invention in any way. Rather, the invention presently disclosed and claimed may be used in conjunction with many other cell types, originating from a variety of species. Both cultured cells (primary cultures and established cell lines) and freshly-isolated cells (e.g. from blood separations) may be used according to the method and preparative process of the present invention. In the case of prokaryotic cells, it should be noted that in certain bacterial species, the nanopatches of the present invention may actually be integrated into the outer cell wall of the organism (rather than into the cell membrane), and in those circumstances, used to detect changes that occur in, and in close proximity to, said cell wall as well as changes involving the underlying cell membrane. Consequently, the isolated cells, preparative process and method of the present invention may also be applied to the situation wherein the cells are prokaryotic cells having a

cell wall as their outermost layer, and wherein the nanopatches are incorporated into said cell wall rather than into the cell membrane.

The most preferred polymer for use in preparing the perturbation-sensitive construct of the present invention is polydiacetylene, obtained by the polymerization of monomers selected from the group of diacetylene lipid acids and diacetylene derivatives, such as, for example, tricosadiynoic acid, tricosadiynoic methyl esters, pentacosadiynoic acid and pentacosadiynoic methyl esters. In the absence of membrane perturbation, polydiacetylene absorbs light at a first wavelength which is approximately 640 nm. In the presence of an agent, state or condition that causes a structural and/or functional change in the cell membranes of the cells being studied, or biochemical processes occurring at the cell membrane that perturb the lipid/PDA construct, the absorption is shifted to a second wavelength, which is approximately 520 nm. Thus, a color transition from blue to red indicates that the aforementioned structural and/or functional changes in the membrane or biochemical processes associated with membrane have taken place.

Preferred diacetylene monomers that may be used according to the present invention for preparing the chromatic polydiacetylenes are well known in the art and are described, *inter alia*, in WO 99/10743 and US 2002/0034475, which are incorporated herein by reference.

Most preferably, the monomers are selected from the group consisting of 10,12-tricosadiynoic acid, 10,12-pentacosadiynoic acid, 10,12-octadecadiynoic acid, 5,7-docosadiynoic acid, 5,7-pentacosadiynoic acid and 5,7-tetracosadiynoic acid. These monomers are all commercially available.

Preferred lipids that may be used according to the present invention include, but are not limited to, glycolipids, phospholipids, lipopolysaccharides, steroids and alcohol derivatives thereof, extracts of lipids of the cell membrane obtained from various microorganisms as well as other components of the cell membrane. Particularly preferred lipids are selected from the group consisting of dimirystoylphosphatidylcholine (DMPC), phosphatidylglycerol (PG) dipalmitoylphosphatidylcholine (DPPE), natural phosphatidylcholine (PC), dimirystoylphosphatidylcholine (DMPG), cardiolipin, dimyristoylphosphatidylserine (DMPS), sphingomyelin, ceramide, galactosylceramide, and cholesterol, or mixtures thereof.

The above-disclosed nanopatch sensors comprising polydiacetylene and lipids exhibit visible blue to red transitions, when subjected to membrane-perturbing agents and conditions. This chromatic transition can be observed by the naked eye. Alternatively, the color changes may be recorded and/or quantified by means of UV/visible spectrophotometry using a standard spectrophotometer or an ELISA plate reader. Typically, the spectrophotometric reading is made at 27°C using a 1 cm optical path cell with

a standard laboratory spectrophotometric device such as the Hewlett-Packard 8452A diode array spectrophotometer.

The quantitative measurement of the color transition exhibited by the perturbation-sensitive constructs following disturbance to the cell membrane conformation and/or function may be carried out similarly to the description given in WO 00/55623, which is incorporated herein by reference.

The fluorescent emission associated with the chromatic transition may be detected by any suitable technique, for example, by the use of an inverted microscope fitted with fluorescent excitation and detection means, or by the use of a laser scanning confocal microscope. Quantitative measurements of both the fluorescent emission and the chromatic transition may be made using the abovementioned microscopic techniques coupled with suitable image analysis apparatus and algorithms.

The method for detecting and/or measuring agents and conditions that cause perturbations in the cell membranes of living cells that was disclosed hereinabove may be employed to detect and/or measure changes in membrane conformation and/or function that result from the chemical and physical modifications caused by many different agents and conditions. The following short list of possible applications of the claimed method is by no means exhaustive and is intended to be illustrative rather than limiting:

1. Detection of changes in osmotic pressure of the extracellular environment.

Colorimetric/fluorescence transitions occur when cells are placed in a solution having a high osmotic pressure (e.g. a concentrated sucrose solution). Thus, the osmotic gradient created by increasing the osmotic pressure of the medium in which the cells are contained causes distortion of the cell morphology and membrane disruption, giving rise to the observed changes in the nanopatch sensor color and fluorescence.

2. Detection or measurement of changes of membrane effects following the action of membrane-active peptides.

Membrane-active peptides, such as cytolytic and hemolytic peptides, generally penetrate and disrupt the cellular membrane by means of pore formation and/or membrane micellization and/or other membrane perturbation processes. Following such disruption, the characteristic chromatic transition and fluorescent emission of the nanopatch sensor may be detected and measured.

3. Detection and measurement of apoptosis-inducing substances

The chromatic cellular assembly can detect morphological changes in the cells which occur following induction of apoptotic or necrotic processes induced by various substances interacting with the cell.

4. Lipid fusion processes

The engineered cells of the present invention can be used to report the occurrence of fusion events such as the fusion of vesicles and lipoplexes with the cellular membrane, as well cell-cell fusion processes.

5. Drug action and other receptor-mediated processes

The presently-claimed nanopatch-containing cells may also be used to detect the penetration of drugs and other ligands into said cells and the subsequent binding of these ligands to their specific receptors. Such ligands can include naturally-occurring messengers, chemical mediators and modulators, as well as pharmacological agents.

In addition to the applications given in the foregoing list, the nanopatch-containing cells of the present invention may be used to detect the presence of various analytes that are capable of interacting with cellular membranes, including microorganisms and toxins produced thereby, metal cations, peptides, proteins, biological ligands and pharmaceutically active compounds.

Metal cations that may be detected according to the present invention include alkali or alkaline-earth metals, as well as transition metals.

Peptides that may be detected by the method of the present invention include antimicrobial peptides, membrane-active peptides and cytolytic peptides. The peptides may contain between 5 to 100 amino acids, and may have hydrophobic and amphipathic domains.

Pharmaceutically active compounds that may be detected by the method of the present invention include, but are not limited to, hydrophobic compounds having molecular weight of below 1000 g/mol, that are capable of binding and permeating cellular membrane or physiological lipid barriers, such as drugs, metabolites and penetration enhancers.

Proteins that may be detected by the method of the present invention include, but are not limited to, membrane proteins, lipophilic enzymes and signaling proteins. Other biological ligands that may be detected by the method of the present invention include hormones and biological compounds that specifically bind or permeate cellular membranes or have specific affinities to membrane receptors.

The above-described potential uses of the isolated cells and methods of the present invention are provided for the sake of illustration only, and are not intended to be limiting in any way. Thus, the claimed isolated cells and associated method could be used for the detection of diverse biological and pharmacological processes (in addition to those described hereinbefore) including viral fusion, cell-cell communication and gene therapy, as well as all other processes, agent-mediated actions and states that require the involvement of the cell membrane.

The following examples are provided for illustrative purposes and in order to more particularly explain and describe the present invention. The present invention, however, is not limited to the particular embodiments disclosed in the examples.

Example 1

Preparation of bio-engineered cells

1.1 Cell cultures

1.1.1 Suspension culture cells

Cells of the U937 human promonocytic leukemia cell line were cultured in RPMI 1640 culture medium supplemented with 10% fetal calf serum (FCS) and 1% penicillin/streptomycin, using a standard cell culture incubator at 37°C under a 5% CO₂ atmosphere. The cells were maintained at a density of 5 x 10⁵ cells/ml.

1.1.2 Adenocarcinoma cells

MCF-7 human breast adenocarcinoma cells were grown as a monolayer culture in DMEM medium supplemented with 10% FCS, 2 mM L-glutamine and 1% penicillin/streptomycin in 60 mm culture dishes. The cells were incubated at 37°C in a humidified incubator in a 5% CO₂ environment. The cultured cells were regularly examined using an inverted microscope.

1.1.3 CHO cells

CHO cells were cultured in F-12 medium supplemented with 5% FCS, 1% L-glutamine, 1% Penicillin/Streptomycin and HEPES 1mM.

1.2 Preparation of the lipid/polymer nanopatch sensor

The PDA monomeric unit 10,12-tricosadiynoic acid (TRCDA) and lipid components such as dimyristoylphosphatidylglycerol, dimyristoylphosphatidylcholine and dimyristoylphosphatidylethanolamine were mixed together in different ratios and diluted in a solvent system comprising chloroform : methanol (1:1), and dried under vacuum. The preparation was then sonicated in deionized water at approximately 70°C, cooled at room temperature and kept at 4°C overnight. The final total lipid concentration was approximately 3 mg/ml.

1.3 Fusion of the nanopatch sensor within the cell membrane of the cultured cells

Cells from suspensions were harvested from the growth medium and washed in buffer (HEPES 20 mM, NaCl 137 mM, KCl 2.7 mM, KH₂PO₄ 1 mM, Glucose 25 mM, pH 7.6) using centrifugation at 250g for 7 minutes.

Approximately two million cells were re-suspended in 2 ml of base buffer to which the lipid/monomer aqueous solution was added to a final lipid concentration of 0.3 mg/ml, and incubated for 30 minutes under slow shaking (65 rpm) at 25°C. Fusion was stopped by washing the cells three times with the base buffer.

The lipid/monomer/cell composites were then irradiated at 254 nm for 20-30 sec in order to induce polymerization of the PDA, yielding polymerized blue cell suspensions. Prior

to experiments with external stimuli the "blue" cell pellets (5×10^6 cell/ml) were re-suspended in base buffer.

Example 2

Determination of extent of lipid/PDA fusion in bio-engineered cells

The extent of fusion between the lipid/PDA nanopatch sensors and the cell membranes of the cells into which said sensors were inserted (performed as described in Example 1), was determined using a fluorescence resonance energy transfer technique, as described in Struck, D.K. et al., Biochemistry 20: 4093-4099 (1981). Briefly, 125 μ l of lipid/PDA monomer suspension containing the fluorescent compounds N-(7-nitro-2,1,3-benzoxaiazol-4-yl)phosphatidylethanolamine (N-NBD-PE) and N-(lissamine Rhodamine B sulfonyl)dioleoylphosphatidylethanolamine (N-Rh-PE) were added to 1 ml of buffer containing approximately two million monocytic cells. Fusion of the lipid/PDA monomers with the cell membranes was allowed to proceed for 0.5 hour at 25°C under shaking. Following washing and centrifugation, the cell pellets were resuspended in the same buffer. Emission spectra of the cell suspensions at 536 nm (for N-NBD-PE) and 585 nm (for N-Rh-PE) were then obtained at 25°C, using an Edinburgh FL920 spectrofluorimeter (Edinburgh, UK) at an excitation wavelength of 469 nm.

The results obtained in these spectrofluorimetric investigations are shown graphically in Fig. 1. Line 1 of the figure shows the fluorescence emission spectrum of the

aforementioned mixture of lipid/PDA construct precursors containing N-NBD-PE and N-Rh-PE. The 536 nm peak due to NBD emission is small, as a result of energy transfer from NBD to rhodamine.

Line 2 of the figure represents the corresponding spectrum for cells containing the lipid/PDA/rhodamine/NBD construct following fusion of said construct within the cell membrane. Comparison of lines 1 and 2 indicate that following fusion (line 2), the ratio between the 536nm and 585 nm peaks increases, as a consequence of increased separation distance, thereby reducing the amount of energy transfer from NBD to rhodamine. These spectrofluorimetric results thus indicate that the above-described method leads to significant integration of the lipid/PDA construct within the cell membrane.

As a control experiment, the construct-containing cells were then treated with 1% Triton X-100 for a minimum of ten seconds at 25°C. The fluorescence spectrum of these treated cells (line 3) indicates that the disruption of the cell membrane following surfactant treatment results in loss of the spatial relationships between the various molecules in the membrane (including rhodamine and NBD). Consequently, there is less energy transfer from NBD to rhodamine, and the 536 nm peak is correspondingly larger.

Quantitative results of the resonance energy transfer investigations are summarized in the following table:

Lipid/PDA monomer composition (mole:mole)	% Fusion with monocytic cells
TRCDA/PE/PG (4:1:1)	58
TRCDA/PE/PG (8:1:1)	33
TRCDA/PC/PG (8:1:1)	9

Example 3

Viability of bio-engineered cells

Cell viability assays

Viability was estimated by two techniques: trypan blue dye exclusion and acridine orange/ethidium bromide double staining methods.

Trypan blue exclusion method

A small volume of the examined cell suspension was mixed with 0.5% trypan blue in 1:1 (v/v) ratio and incubated for one minute. Following this, approximately 10 μ L of the mixture was placed under the microscope and stained cells were counted using a hemocytometer. Non-viable cells absorb the dye and appear blue, while viable cells remain opaque.

Acridine orange/ethidium bromide staining

Apoptosis was determined morphologically after staining with acridine orange and ethidium bromide and counting viable cells by fluorescence microscopy. Cell density was adjusted to 1×10^6 cells/ml in buffer. Acridine orange and ethidium bromide (1:1) (v/v) mixed in PBS (phosphate buffer solution) to a final concentration of 100µg/ml. 2 µl dye was mixed with 25 µl of cell suspension and cells were immediately checked.

The cellular morphology was evaluated by fluorescence microscopy (Olympus IX70, Japan) using a 20x 0.5 objective and an LP520 nm filter. Apoptotic cells were essentially characterized by nuclear condensation of chromatin and/or nuclear fragmentation. Necrotic cells were identified by uniform labeling of the cells with ethidium bromide. About 300 cells were evaluated for apoptosis and/or necrosis for each sample.

The results of the viability study are shown in the following table:

Time after sensor incorporation	Acridine Orange/Ethidium Bromide				Trypan Blue
	Live	Necrotic	Early Apoptotic	Late Apoptotic	Live Cells
1.5 hours	90%	7%	3%	3%	90%
2 hours	89%	2%	4%	4%	89%
3 hours	66%	6%	23%	4%	78%

Example 4

Detection of membrane perturbations using nanopatch- containing U937 cells

U937 cells were grown and prepared as described in section 1.1 of Example 1, hereinabove. The precursors of the Lipid/PDA constructs (i.e. a mixture of 10,12-tricosadiynoic acid, PE and PG at a molar ratio of 8:1:1) were prepared and introduced into the cells in accordance with the methods described in sections 1.2 and 1.3 of Example 1.

Separate aliquots of cells containing the lipid/PDA constructs were then subjected to the following membrane-perturbing treatments:

A. Heat treatment

Fig. 2 demonstrates the chromatic transition (upper photographs) and fluorescent emission (lower photographs) that occur following the application of thermal stress to lipid/PDA nanopatch-containing U937 cells, by means of rapid heating. The upper right photograph shows the appearance of the cells under regular illumination following the thermal stress. (The cells appear red in color photomicrographs.) The lower right photograph shows the fluorescent emission that accompanies the chromatic transition following the thermal stress.

B. Elevation of osmotic pressure

The photomicrograph shown in Fig. 3 shows the fluorescent emission of the lipid/PDA constructs contained within cells

following their exposure to a high osmotic pressure environment (1M sucrose) at 25°C for periods of 5 to 15 minutes. The ultraviolet-visible absorption spectra of the same cells are shown in Fig. 4, wherein line 1 is the spectrum for the cells prior to the sucrose treatment, and line 2 is the corresponding spectrum obtained following said treatment.

C. Incubation with a membrane-active peptide

Fig. 5 is a photomicrograph that demonstrates the characteristic fluorescent microscopy image that is observed following the incubation of the nanopatch-containing cells in medium containing 50µM of the membrane-active polymyxin-B peptide for periods of 5-15 minutes at 25°C.

D. Incubation with a lipophilic drug

Fig. 6 shows the characteristic fluorescent emission that is observed following the incubation of the nanopatch-containing cells in medium containing 5µM of lidocaine at 25°C for periods of between 5 and 15 minutes.

E. Incubation with lipoplexes

Fig. 7 demonstrates the fluorescence of the cells that occurs following their co-incubation with lipoplexes for approximately 30 minutes. The lipoplexes used comprise N-[1-(-2,3-Dioleoyloxy)propyl]-N,N,N-trimethylammonium and L-α-Phosphatidylethanolamine, dioleoyl at a molar ratio of 0.72:0.67. The mixture contained a total lipid concentration of 1 mg/ml. 5 µl of this lipoplex solution

was added to 60 μ l of suspension (approximately 2 million cells).

Example 5

Detection of membrane perturbations using nanopatch- containing neuron cells

5.1 Cell Culture Preparation

Cell cultures were prepared from the Hippocampi of one-day-old rat pups as follows. Tissue was treated for 30 min at 37°C with 0.25% trypsin (type XI; Sigma), and then gently triturated and the dissociated cells were plated at a concentration of 2×10^5 /ml onto poly-D-lysine (20 mg/ml; Sigma) and laminin (10 mg/ml; Collaborative Research)-coated glass coverslips. Cells were plated in Eagle's minimal essential medium (MEM) containing 10% heat-inactivated fetal bovine serum (HyClone), 2 mM glutamine, and 0.76% glucose. On the following day, the medium was replaced with fresh SF1C medium [Rayport, D. et al. (1992) *J. Neurosci.* **12**, 4264-4280], including B-27 supplements (GIBCO). The cells were grown for up to 12 days in a humid incubator containing 5% CO₂/95% air at 37°C prior to use.

5.2 Fusion of the lipid/monomer assemblies with neurons.

Cells were incubated with DMPE/DMPG/PDA -1:1:6 (mole ratio) vesicles in TG1 buffer (119mM NaCl, 5mM KCl, 30mM Glucose, 32mM Sucrose, 20mM Hepes, pH=7.3) for 1 hour at room temperature. Following the fusion, vesicles were polymerized by UV irradiation at 254nm for 10 seconds and the unbound vesicles were washed 3 times with TG1 buffer.

5.3 Fluorescent micrography

Fluorescent images of the cells were acquired using a Zeiss 200M microscope (Germany) fitted with a CY3 570-650nm emission range filter (Chroma Technology Corp., Rockingham, VT) and CCD cooled camera (PCO). A control image acquired after the polymerization step showed negligible level of the emission intensity. Fig. 8 is a photomicrograph of nanopatch-containing cultured neuronal cells that were prepared as described hereinabove. The white fluorescent light emitted by the cells emanates from the red phase of the polydiacetylene polymer, following incubation of the lipid/PDA/neuron construct in a medium containing 50 mM calcium ions.

While specific embodiments of the invention have been described for the purpose of illustration, it will be understood that the invention may be carried out in practice by skilled persons with many modifications, variations and adaptations, without departing from its spirit or exceeding the scope of the claims.

Claims

1. Isolated cells comprising nanopatch sensors integrated into the cell membrane thereof, wherein said sensors are provided in the form of perturbation-sensitive constructs, and wherein said perturbation-sensitive constructs respond to perturbations of the cell membrane by means of a detectable change in one or more physical or chemical properties associated with said construct.
2. The isolated cells according to claim 1, wherein the construct comprises a polymer associated with one or more lipid components.
3. The isolated cells according to claim 2, wherein the polymer is polydiacetylene (PDA).
4. The isolated cells according to claim 3, wherein the PDA is a polymer of 10,12-tricosadionic acid, and the lipid components are selected from the group consisting of dimyristoylphosphatidylglycerol,
dimyristoylphosphatidylcholine and
dimyristoylphosphatidylethanolamine.
5. The isolated cells according to claim 1, wherein the detectable change in the physical or chemical properties associated with the perturbation-sensitive constructs is a change in the visible range absorption spectrum of said cells.

6. The isolated cells according to claim 1, wherein the detectable change in the physical or chemical properties associated with the perturbation-sensitive constructs is a change in the fluorescent emission spectrum of said cells.

7. A process for producing living cells comprising the aforementioned nanopatch sensors according to claim 1, wherein said process comprises the steps of preparing an aqueous solution comprising the perturbation-sensitive construct, or precursors thereof, and co-incubating a suspension of said living cells with said construct or construct precursors, such that said construct becomes integrated into the cell membrane of said living cells.

8. The process according to claim 7, wherein the perturbation-sensitive construct comprises a polymerizable material associated with one or more lipid components, and said process further comprises polymerization-inducing short ultraviolet irradiation of the said construct following co-incubation with the living cells.

9. The process according to claim 8, wherein the polymerizable material is a monomer that may be polymerized to form PDA.

10. The process according to claim 9, wherein the monomer is 10,12-tricosadionic acid, and the lipid components are selected from the group consisting of dimyristoylphosphatidylglycerol, dimyristoylphosphatidylcholine and dimyristoylphosphatidylethanolamine.

11. A method for detecting and/or measuring agents and conditions that cause perturbations in the cell membranes of living cells, wherein said method comprises the steps of providing isolated nanopatch sensor-containing cells according to claim 1, exposing said nanopatch sensor-containing cells to a known or putative perturbation-inducing agent or condition, and detecting and/or measuring one or more changes in the physical or chemical properties associated with said nanopatch sensors.

12. The method according to claim 11, wherein the perturbation-sensitive construct contained within the nanopatch sensors comprises a polymer associated with one or more lipid components.

13. The method according to claim 12, wherein the polymer is PDA.

14. The method according to claim 13, wherein the PDA is a polymer of 10,12-tricosadionic acid, and the lipid components are selected from the group consisting of dimyristoylphosphatidylglycerol, dimyristoylphosphatidylcholine and dimyristoylphosphatidylethanolamine.

15. The method according to claim 14, wherein the change in the physical or chemical properties associated with said nanopatch sensors to be detected and/or measured is a change in the visible range absorption spectrum of said sensors.

16. The method according to claim 15, wherein the change in the physical or chemical properties associated with said nanopatch sensors to be detected and/or measured is a change in the fluorescent emission spectrum of said sensors.

17. The method according to any one of claims 11 to 16, wherein the perturbations comprise changes in the three-dimensional conformation of the cell membrane.

18. The method according to any one of claims 11 to 16, wherein the perturbations comprise changes in the function of the cell membrane.

19. The method according to any one of claims 11 to 16, wherein the perturbations are caused by biochemical processes occurring at the cell membrane surface, and wherein said processes do not cause any significant structural or functional changes within said cell membrane.

20. Isolated prokaryotic cells comprising nanopatch sensors integrated into the cell wall thereof, wherein said sensors are provided in the form of perturbation-sensitive constructs, and wherein said perturbation-sensitive constructs respond to perturbations of the cell wall and/or of the underlying cell membrane by means of a detectable change in one or more physical or chemical properties associated with said construct.

21. The isolated prokaryotic cells according to claim 20, wherein the perturbation-sensitive constructs comprise a PDA polymer associated with one or more lipid components selected from the group consisting of dimyristoylphosphatidylglycerol, dimyristoylphosphatidylcholine and dimyristoylphosphatidylethanolamine.

22. The isolated prokaryotic cells according to claim 20, wherein the detectable change in the physical or chemical properties associated with the perturbation-sensitive constructs is a change in the visible range absorption spectrum of said cells.

23. The isolated prokaryotic cells according to claim 20, wherein the detectable change in the physical or chemical properties associated with the perturbation-sensitive constructs is a change in the fluorescent emission spectrum of said cells.

24. A process for producing living prokaryotic cells comprising the aforementioned nanopatch sensors according to claim 20, wherein said prokaryotic cells have a cell wall as their outer layer, and wherein said process comprises the steps of preparing an aqueous solution comprising the perturbation-sensitive construct, or precursors thereof, and co-incubating a suspension of said living cells with said construct or construct precursors, such that said construct becomes integrated into the cell wall of said cells.

25. The process according to claim 24, wherein the perturbation-sensitive construct comprises a polymerizable material associated with one or more lipid components, and said process further comprises polymerization-inducing short ultraviolet irradiation of the said construct following co-incubation with the living cells.

26. The process according to claim 25, wherein the polymerizable material is 10,12-tricosadionic acid, and the lipid components are selected from the group consisting of dimyristoylphosphatidylglycerol, dimyristoylphosphatidylcholine and dimyristoylphosphatidylethanolamine.


27. A method for detecting and/or measuring agents and conditions that cause perturbations in the cell walls and cell membranes of living cell-wall containing prokaryotic cells, wherein said method comprises the steps of providing isolated nanopatch sensor-containing cells according to claim 20, exposing said nanopatch sensor-containing cells to a known or putative perturbation-inducing agent or condition, and detecting and/or measuring one or more changes in the physical or chemical properties associated with said nanopatch sensors.

28. The method according to claim 27, wherein the perturbations comprise changes in the three-dimensional conformation of the cell wall and/or cell membrane.

29. The method according to claim 27, wherein the perturbations comprise changes in the function of the cell wall and/or cell membrane.

30. The method according to claims 27, wherein the perturbations are caused by biochemical processes occurring at the cell wall surface and/or cell membrane surface, and wherein said processes do not cause any significant structural or functional changes within said cell wall and/or cell membrane.

For the Applicants
Pyernik Rutman

By: 

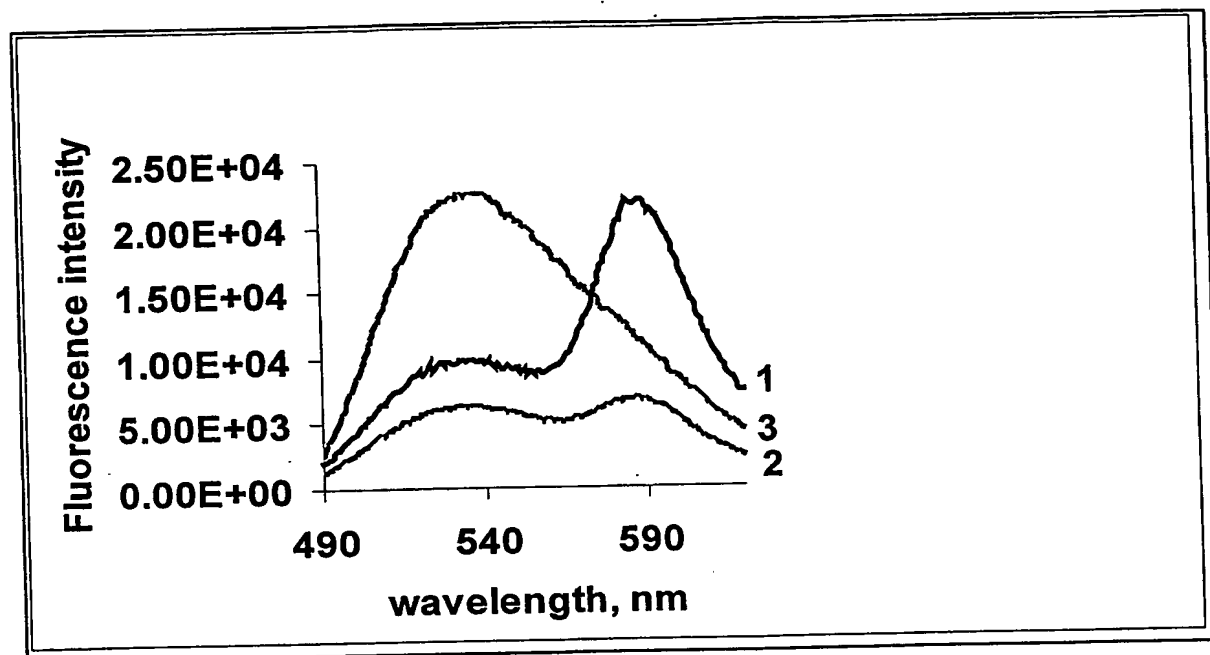


Fig. 1



Fig. 2

עמוד 3 מתוך 8

אוניברסיטת בן-גוריון בנגב
הרשות למחקר ופיתוח

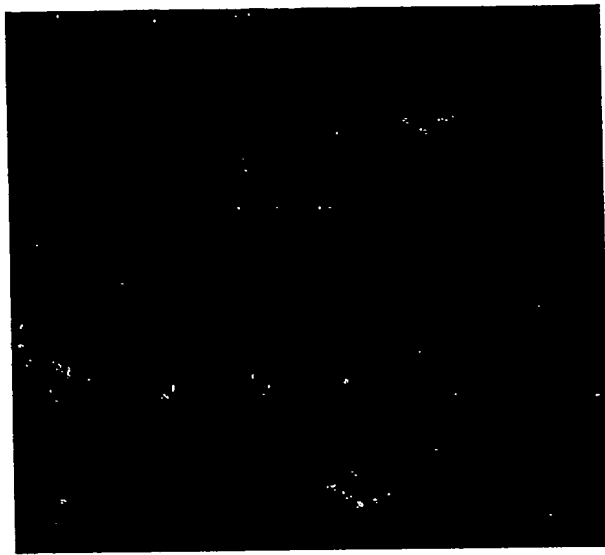


Fig. 3

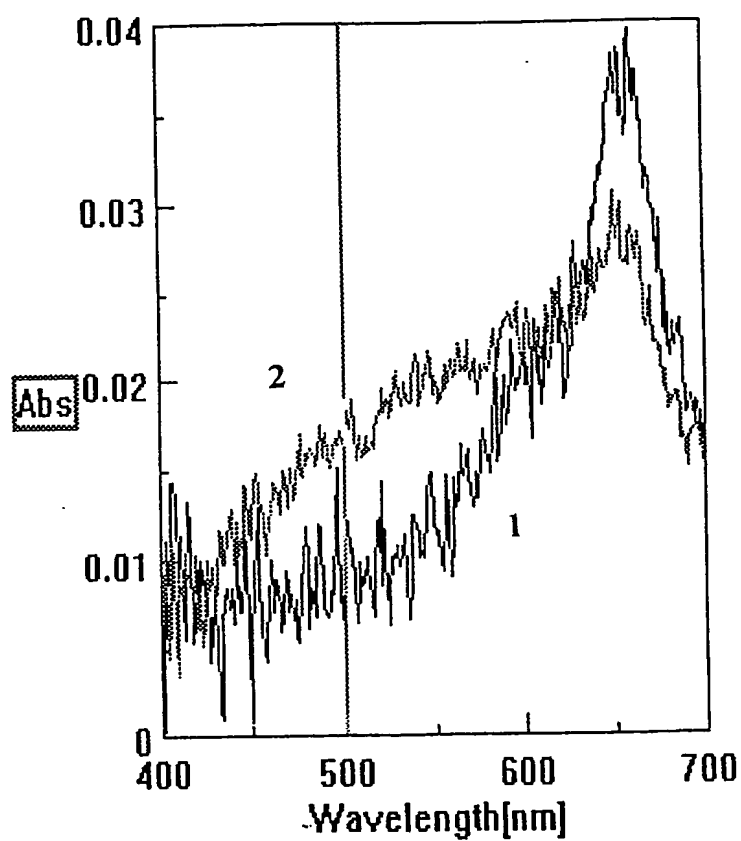


Fig. 4

עמוד 5 מתוך 8

אוניברסיטת בן-גוריון בנגב
הרשות למחקר ופיתוח

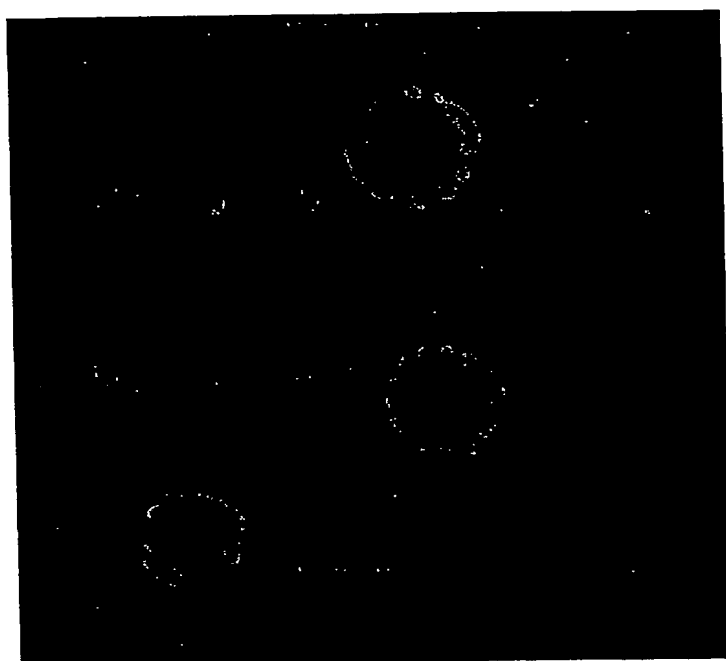


Fig. 5

עמוד 6 מתוך 8

אוניברסיטת בן-גוריון בנגב
הרשות למחקר ופיתוח

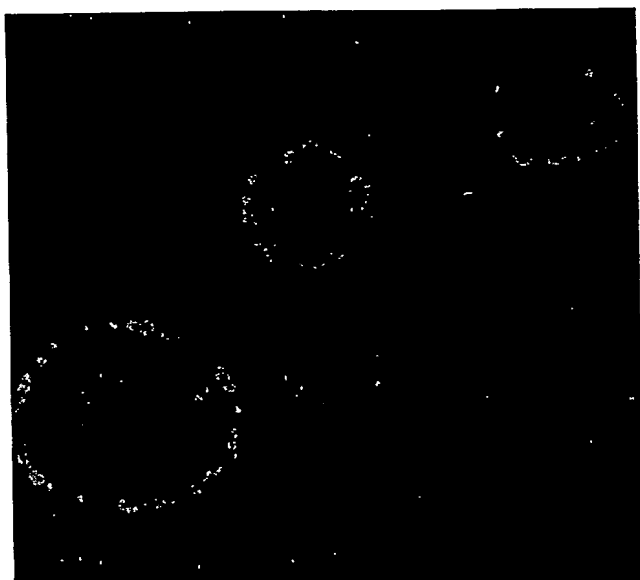


Fig. 6

עמוד 7 מתוך 8

אוניברסיטת בן-גוריון בנגב
הרשות למחקר ופיתוח



Fig. 7

עמוד 8 מתוך 8

אוניברסיטת בן-גוריון בנגב
הרשות למחקר ופיתוח

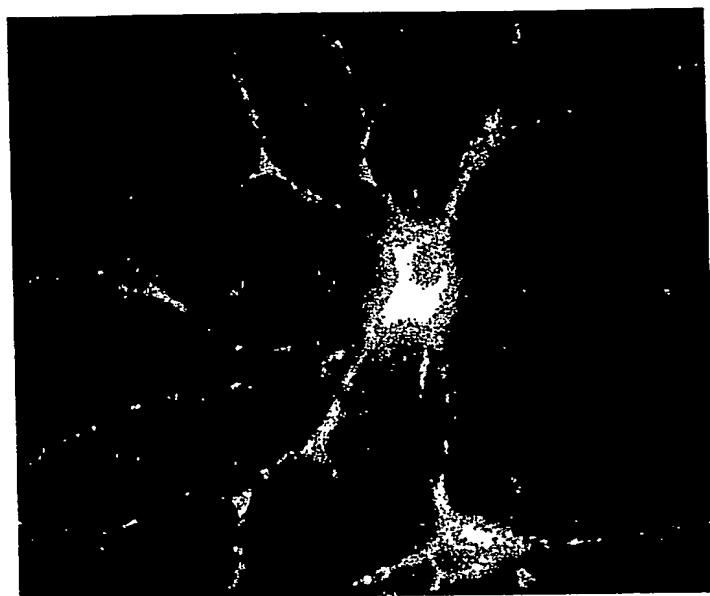


Fig. 8

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.